

HSNO. 637592

REPORT NUMBER: 131-MGA-05-003

SAFETY COMPLIANCE TESTING FOR
FMVSS NO. 131
SCHOOL BUS PEDESTRIAN SAFETY DEVICES

Girardin Minibus Inc.
2005 Girardin Minibus
NHTSA No. C50902

PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105





Final Report Date: February 2, 2005

FINAL REPORT


PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
400 SEVENTH STREET, SW, ROOM 6115 (NVS-220)
WASHINGTON, D.C. 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: February 2, 2005
Jim Hansen, Program Manager

Reviewed by:  Date: February 2, 2005
John Roberts, Project Engineer

FINAL REPORT ACCEPTED BY:


2/8/05
Date of Acceptance

Technical Report Documentation Page

1. Report No. 131-MGA-05-003		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 131 Compliance Testing of 2005 Girardin Minibus School Bus NHTSA No.: C50902		5. Report Date February 2, 2005			
		6. Performing Organization Code MGA			
7. Author(s) Jim Hansen, Program Manager John Roberts, Project Engineer		8. Performing Organization Report No. 131-MGA-05-003			
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.			
		11. Contract or Grant No. DTNH22-02-R-01057			
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration; Enforcement Office of Vehicle Safety Compliance (NVS-220) 400 Seventh St., S.W. Room 6115 Washington, D.C. 20590		13. Type of Report and Period Covered Final Report 1/11/2005 – 2/2/2005			
		14. Sponsoring Agency Code NVS-220			
15. Supplementary Notes					
16. Abstract Compliance tests were conducted on the subject, 2005 Girardin Minibus School Bus NHTSA No. C50902, in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-131SB-01 for the determination of FMVSS 131 compliance. Test failures identified were as follows: None					
17. Key Words Safety Bus Compliance Testing Safety Engineering FMVSS 131			18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin., Technical Information Services (TIS), Room 2336 (NPO-405) 400 Seventh Street, S.W. Washington, D.C. 20590		
			21. No. of Pages 25		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified			

TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose of Compliance Test	1
2	Test Data Summary	2
3	Compliance Test Data	4
	Data Sheet 1- Dimensions of Stop Signal Arm (S5.1)	5
	Data Sheet 2 – Surface Content and Labeling (S5.2)	6
	Data Sheet 3 – Conspicuity (S5.3)	7
	Data Sheet 4 - Stop Signal Arm Installation (S5.4)	10
	Data Sheet 5 - Stop Signal Arm Operation (S5.5)	11
4	Instrumentation and Equipment List	12
5	Photographs	13

SECTION 1
PURPOSE OF COMPLIANCE TEST

Tests were conducted by the MGA Research Corporation-Wisconsin Operations on a 2005 Girardin Minibus School Bus, NHTSA No. C50902, in accordance with the specifications of the Office of Vehicle Safety Compliance (OVSC) Test Procedures TP-131SB-01 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) 131, "School Bus Pedestrian Safety Devices."

This program is sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-02-D-01057.

SECTION 2
TEST DATA SUMMARY

Based on the tests performed, the 2005 Girardin Minibus School Bus, NHTSA No. C50902, appears to meet all of the requirements of FMVSS 131. See Test Summary Data Sheet on the following page.

FMVSS 131, SCHOOL BUS PEDESTRIAN SAFETY DEVICES
VEHICLE INFORMATION AND TEST SUMMARY

Test Vehicle: **2005 Girardin Minibus School Bus**
 Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
 Test Date: **1/11/05**

VIN	1FDSE35L85HA02436	Chassis Cab	Yes
No. of Stop Signal Arms	1	Forward Control	No
Pass. Capacity (driver included)	19	Rear Engine	No
Stop Signal Arm Manufacturer	BMR Manufacturing	Tire Size (on bus)	LT245/75R16

DATA FROM CERTIFICATION LABEL

Final Stage Manufacturer	Girardin	Date of Mfg.	09/2004
Incomplete Vehicle Manufacturer	Ford Motor Company	Date of Mfg.	08/2004
GVWR (kg)	4354	GAWR Front (kg)	2086
		GAWR Rear (kg)	2759

TEST SUMMARY

	Pass/Fail or N/A
Dimensional Requirements (S5.1)	PASS
Surface Content and Labeling (S5.2)	PASS
Conspicuity Requirements (S5.3)	PASS
Location and Position Requirements (S5.4)	PASS
Arm Operation Requirements (S5.5)	PASS

SECTION 3
COMPLIANCE TEST DATA

**FMVSS 131 – DATA SHEET 1
DIMENSIONS OF STOP SIGNAL ARM (S5.1)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

"Regular octagon" with diameter of at least 450 mm (point to point).

	Forward Signal Arm (mm)	Rearmost Signal Arm (mm)
Diameter 1	495	---
Diameter 2	496	---
Diameter 3	495	---
Diameter 4	496	---
Range (max. – min.)	1	---

REQUIREMENTS	Yes, No, N/A
Are all octagon diameter values ≥ 450 mm?	Yes
Is range of octagon diameter values ≤ 12 mm?	Yes
Are all octagon chord dimensions equal within 6 mm?	Yes

Test Results		Pass/Fail
S5.1	Dimensions of Stop Signal Arm	PASS

Tested By:

Date: January 11, 2005

Approved By:

**FMVSS 131 – DATA SHEET 2
SURFACE CONTENT AND LABELING (S5.2)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

REQUIREMENTS	Forward Signal Arm		Rearmost Signal Arm	
	Front Side	Aft Side	Front Side	Aft Side
Color RED except for border & legend (Yes/No)	YES	YES	---	---
Color of border is WHITE (Yes/No)	YES	YES		---
Color of word "STOP" is WHITE (Yes/No)	YES	YES		---
Word "STOP" is in upper case letters (Yes/No)	YES	YES		---
Width of border (≥ 12 mm)	14 mm	14 mm		---
Percent of border obscured by mounting brackets, clips, or bolts, or other components ($15\% \leq$) *	0%	14%		---
Height of letters (≥ 150 mm)	152 mm	152 mm		---
Stroke width of letters (≥ 20 mm)	25 mm	25 mm		---


* = In addition to area obscured by 2 optional red lamps, if installed.

NOTE:

1. Front side of rearmost signal arm shall not contain any lettering or border.

Test Results		Pass/Fail
S5.2	Surface content and labeling	PASS

Tested By:



Approved By:



Date: January 11, 2005

**FMVSS DATA SHEET 3
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

The Stop Signal Arm shall comply with either S5.3.1 or S5.3.2, or both.

REFLECTORIZED MATERIAL (S5.3.1)

Requirements	Forward Signal Arm		Rearmost Signal Arm	
	Front Side	Aft Side	Front Side	Aft Side
Entire surface of stop signal arm reflectorized except for mounting brackets, clips, bolts, or other necessary components. Front side of rearmost stop signal arm must not be reflectorized. (Yes/No)	YES ¹	YES ¹	---	---
Percent of entire surface obscured by mounting brackets, clips, bolts or other components necessary for mechanical or electrical operation. (7.5% max. each side)	0% ²	4% ²	---	---

Test Notes:

¹ Flashing lights prevent full reflectorization.

² Percentages do not include area obscured by red flashing lights.

**FMVSS 131 DATA SHEET 3...continued
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Optional Illuminated Lettering (S5.3.1.1)

Item	Stop Signal Arm	
	Forward	Rearmost
Does the stop sign(s) have illuminated lettering? If optional illuminated lettering is installed, the following requirements apply in addition to reflectorized surface.	NO	---

Requirements	Forward Signal Arm		Rearmost Signal Arm	
	Front Side	Aft Side	Front Side	Aft Side
Only Red lamps used (Yes/No)	N/A	N/A	---	---
Red lamps form the complete shape of each letter of the legend. (Yes/No)	N/A	N/A	---	---
Red lamps centered within stroke of each letter (yes/No) or Red lamps outline each letter in immediately surrounding area (Yes/No)	N/A	N/A	---	---
The shape of each letter remains constant (Yes/No)	N/A	N/A	---	---
Net stroke width \geq 15 mm (stroke width minus lamp width)	"S"	N/A	N/A	---
	"T"	N/A	N/A	---
	"O"	N/A	N/A	---
	"P"	N/A	N/A	---
Lamps on each side of the signal arm flash (60-120 flashes/min.)	N/A	N/A	---	---
Lamps current "on" time of 30% to 75% of the total flash cycle	N/A	N/A	---	---
Total current "on" time for the two terminals shall be between 90-110% of the total flash cycle.	N/A	N/A	---	---
If Xenon short-arc lamps – "off" time before each flash of at least 50% of the total flash cycle.	N/A	N/A	---	---

Lamp Type	Filament
	Gaseous Discharge
	Light emitting diode

**FMVSS 131 DATA SHEET 3...continued
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

RED FLASHING LAMPS (S5.3.2)

Requirements	Forward Signal Arm		Rearmost Signal Arm	
	Front Side	Aft Side	Front Side	Aft Side
Red lamps centered on the vertical centerline (At least 2, enter quantity)	2 - YES	2 - YES	---	---
One lamp at extreme top and another at extreme bottom (Yes/No)	YES	YES	---	---
Lamps on each side of the signal arm flash alternately (60-120 flashes/min.)	YES	YES	---	---
Lamps current "on" time of 30% to 75% of the total flash cycle.	YES	YES	---	---
Total current "on" time for two terminals shall be between 90 and 110% of the total flash cycle.	YES	YES	---	---
If Xenon short-arc lamps-"off" time before each flash of at least 50% of total flash cycle.	N/A	N/A	---	---
Symbol "DOT" on each lamp lens (Yes/No)	NO	NO	---	---
Additional markings on lamp lenses	SMC-194 FMVSS 131 SAE J1138	SMC-194 FMVSS 131 SAE J1138	---	---

MARKINGS ON THE FLASHER

Make	Unknown	Serial No.	Unknown
Model	Unknown	Date of Mfg.	Unknown

Test Notes:

TEST RESULTS		Pass/Fail or N/A
S5.3.1	Reflectorized Material	N/A
S5.3.1.1	Optional Illuminated Lettering	N/A
S5.3.2	Red Flashing Lamps	PASS

Tested By: 

Approved By: 

Date: January 11, 2005

**FMVSS 131 DATA SHEET 4
STOP SIGNAL ARM INSTALLATION (S5.4)**


Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Dimensions and angles measured with Signal Arm in the extended position.

Requirements	Stop Signal Arm	
	Forward	Rearmost
Signal arm perpendicular to side of bus (Measure angle between vertical plane of side of bus and vertical plane of the signal arm.) $90 \pm 5^\circ$	YES 86°	---
Top edge of signal arm parallel to horizontal plane (Measure angle between vertical plane of side of bus and the top edge of the signal arm.) $90 \pm 5^\circ$	YES 88.6°	---
Top edge of signal arm not more than 152.4 mm from a horizontal plane tangent to lower edge of frame of passenger window immediately behind the driver's window.		
Measure top corner closest to the school bus	123 mm	---
Measure top corner furthest from school bus	127 mm	---
Vertical centerline of signal arm not less than 228.6 mm away from side of bus	365 mm	---
Stop signal arm(s) installed on left side of bus (Yes, No, or Not Applicable)	YES	---

TEST RESULTS		Pass/Fail or N/A
S5.4	Stop Signal Arm Installation	PASS

Tested By: 
Date: January 11, 2005

Approved By: 

**FMVSS 131 DATA SHEET 5
STOP SIGNAL ARM OPERATION (S5.5)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Stop Signal Arm(s) shall be automatically extended, at a minimum, whenever the red signal lamps on the bus required by FMVSS 108 are activated; except that a manual override device may be installed that prevents automatic extension.

Requirements	Stop Signal Arm	
	Forward	Rearmost
Signal Arm(s) automatically extended when red lights are activated and override device is not activated. (Yes, No, or Not Applicable)	YES	---
If a MANUAL OVERRIDE DEVICE is installed, enter applicable data below:		
Mechanism for activating the override device is within reach of the school bus driver (Yes/No)	N/A	---
While the override device is activated; there is a continuous or intermittent signal audible to the driver unless equipped with optional cut-off timing device (Measure duration ≥ 10 min.)	N/A	---
If audible signal is equipped with optional cut-off timing device, it sounds for at least 60 seconds while the manual override is activated. (Measure 3 times, duration ≥ 60 sec.)	N/A	---
If audible signal is equipped with optional cut-off timing device, it automatically recycles every time the service entry door is opened while the engine is running and the manual override is engaged. (Recycle 3 times, Yes/No each cycle)	N/A	---

Describe location and mode of operation of the manual override control, if installed:

No manual override device was installed on this vehicle which allowed overhead lights to flash and stop signal arm NOT to extend.

TEST RESULTS		Pass/Fail or N/A
S5.5	Stop Signal Arm Operation	PASS

Tested By: 

Date: January 11, 2005

Approved By: 

SECTION 4
INSTRUMENTATION AND EQUIPMENT LIST

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Identify the instruments used during this test and record their make, model, serial number, range, accuracy, and calibration date.

	Digital Caliper	Inclinometer	Tape Measure
Make	Starrett	Digital Protractor	Stanley
Model	721	Pro 360	Powerlock
Serial # (s)	00410129	Complab	167
Range	0 to 150 mm	0 to 360 degrees	0 to 8 m
Accuracy	0.01 mm	0.1 degree	1 mm
Cal. Date	8/26/04	7/29/04	8/13/04
Cal. Due	2/26/05	1/29/05	2/13/05


SECTION 5
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

<u>Photo No.</u>		<u>Page No.</u>
1	3/4 Frontal View from Left Side of Vehicle with Stop Signal Arm(s) Extended	15
2	Incomplete Vehicle Manufacturer's Certification Label	16
3	Vehicle Certification Label and Tire Placard	17
4	Front Close Up View of Stop Signal Arm	18
5	Back Close Up View of Stop Signal Arm	19
6	Close Up View of the Switches That Allow Extension of the Stop Signal Arm(s)	20
7	Switch Console Relative to the Driver Seating Position	21

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902

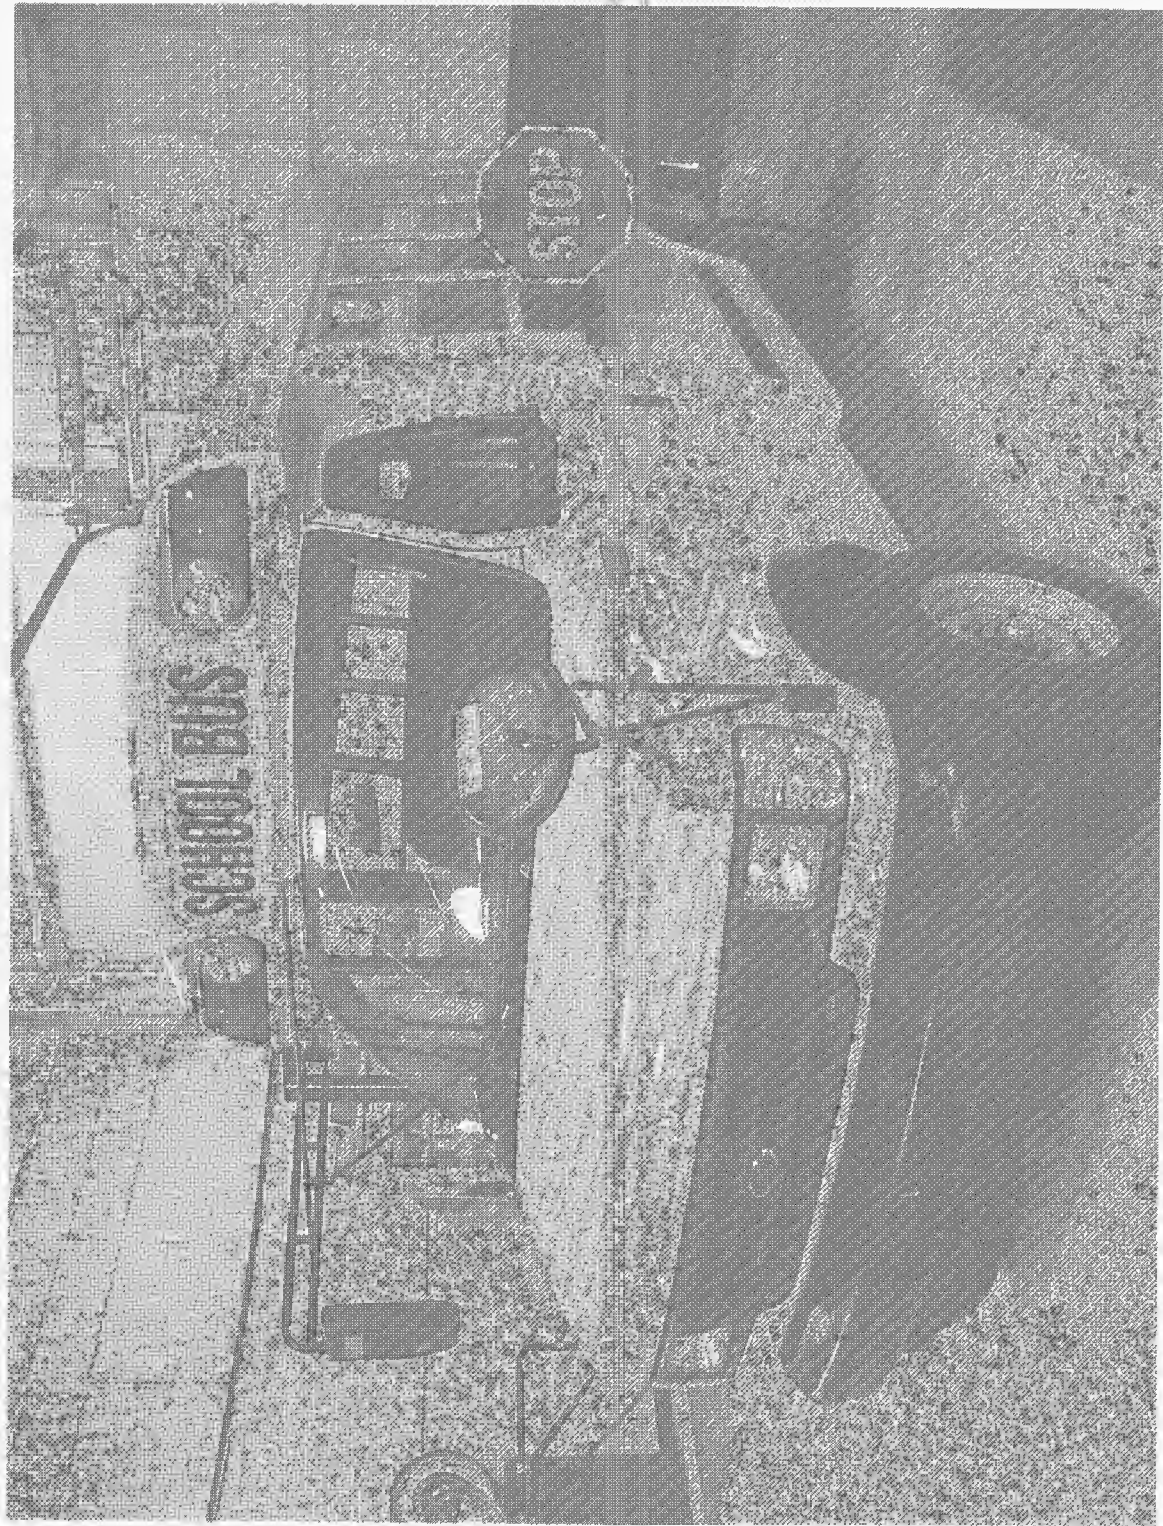

3/4 Frontal View from Left Side of Vehicle with Stop Signal Arm(s) Extended

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131
NHTSA No.: C50902



Incomplete Vehicle Manufacturer's Certification Label

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902

MFB : Girardin Minibus Inc.

DATE OF MANUFACTURE: SEPTEMBER 2004
BODY NUMBER 05-23051

INCOMPLETE VEH MFGD BY: FORD 08/04
GVWR 4000 LBS/4354 KG RIM TIRE CHOICE

GAWB 4600LBS/ 2086 KG WITH LT245/75R16
RIMS 18 X 7 OK @ 380KPA/55PSI COLD SINGLE

GAWR-REAR 6084 LBS/2759 KG WITH LT245/75R16
RIMS 18 X 7 OK @ 550KPA/80PSI COLD SINGLE

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A.
FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECTS
ON THE DATE OF MANUFACTURER

VEHICLE IDENTIFICATION NO. 1FDSE35L85HA02436


CLASSIFICATION SB

01 DRIVER 18 AMBULATORY PASSENGERS



Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902

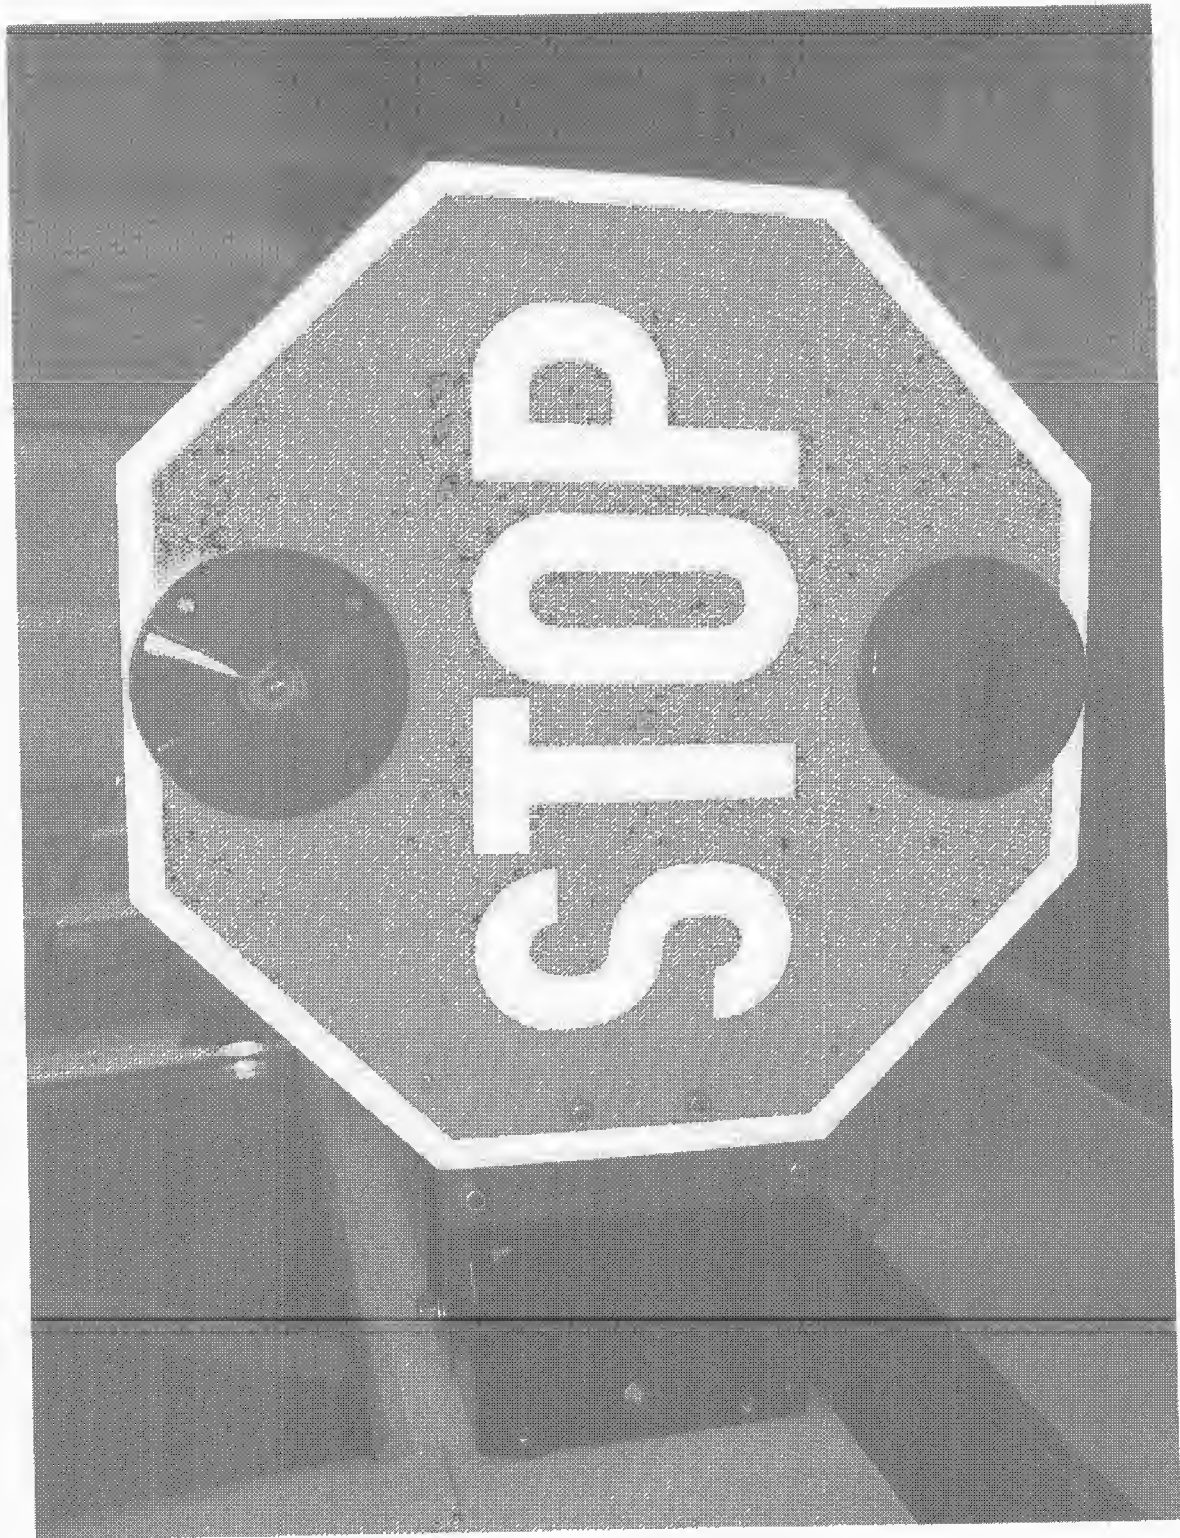

Front Close Up View of Stop Signal Arm

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



Back Close Up View of Stop Signal Arm

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



Close Up View of the Switches That Allow Extension of the Stop Signal Arm(s)

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



Switch Console Relative to the Driver Seating Position